


POLY-ICE

Trawl doors

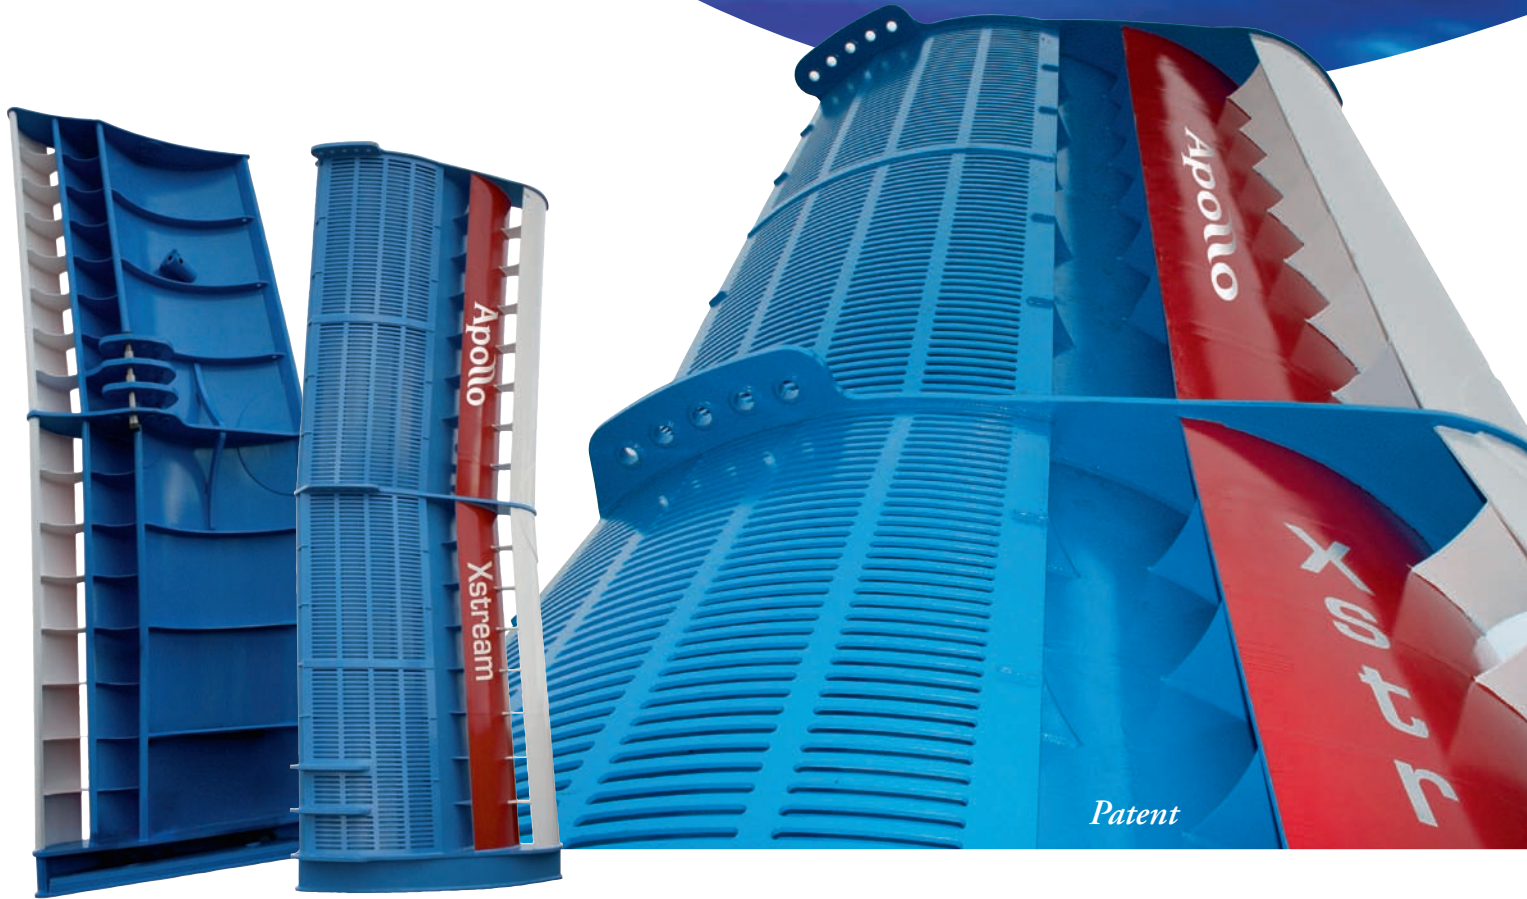

Apollo Xstream

*Patented **Xstream** technology
destroys drag and boosts power*

■ Fitted with Xstream technology

Unique Spreading Force • Unique Lifting Force • Unique Lightness



POLY - ICE[®]

Apollo Xstream

High Aspect Pelagic trawl doors

Standard Sizes and Weights

Size	Minimum weight.	Maximum weight.
2,0 m ²	330 kg	As requested
2,5 m ²	390 kg	"
3,0 m ²	460 kg	"
3,5 m ²	530 kg	"
4,0 m ²	590 kg	"
4,5 m ²	670 kg	"
5,0 m ²	830 kg	"
5,5 m ²	900 kg	"
6,0 m ²	990 kg	"
6,5 m ²	1100 kg	"
7,0 m ²	1460 kg	"
7,5 m ²	1540 kg	"
8,0 m ²	1650 kg	"
8,5 m ²	1900 kg	"
9,0 m ²	2000 kg	"
9,5 m ²	2150 kg	"
10,0 m ²	2210 kg	"
10,5 m ²	2500 kg	"
11,0 m ²	2700 kg	"
11,5 m ²	2750 kg	"
12,0 m ²	2870 kg	"
12,5 m ²	2970 kg	"
13,0 m ²	3050 kg	"
13,5 m ²	3200 kg	"
14,0 m ²	3460 kg	"
14,5 m ²	3500 kg	"
15,0 m ²	3600 kg	"
15,5 m ²	3750 kg	"
16,0 m ²	3900 kg	"

Poly-Ice[®] trawl doors can also be supplied in other sizes and weights

"Keeping trawls open for decades"

Thyborøn Skibssmedie a/s

Sydhalevej 8, DK-7680 Thyborøn Denmark, tlf: +45 97 83 19 22, fax:+45 97 83 23 13, E-mail: mail@thyboron-trawldoor.dk,
www.trawldoor.dk